



Consumentenprijslijst 2024/1

geldig vanaf 01.03.2024

Let op:

Prijsopgaven komen overeen met de niet-bindende adviesverkoopprijs in eenheden en euro's incl. BTW. Prijslijst, technische kenmerken en fouten uitgezonderd. Eerdere Q Acoustics prijslijsten zijn niet langer geldig.



IDC Klaassen International
Distribution & Consulting oHG
Am Brambusch 22
44536 Lünen



Telefoon NL: +49 231 49 62 99 96
Telefax: +49 231 99 33 54 99
E-Mail: idc@idc-klaassen.nl
Internet: www.idc-klaassen.nl




Nederland











Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties	
			Concept 500 Paar	VPE 2 Stuk		
QA2810	5036694045053	5.999,00	zwart bicolor hoogglans	 	2 -weg vloerstaande luidspreker 3-voudige behuizing Behuizingstype Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	„Gelcore“ - Bassreflex 25 - 200 Watt 41Hz - 30kHz 6 Ohm 91 dB 1.150x 350 x 400 42 kg
QA2820	5036694045060		Wit bicolor hoogglans			
QA2815	5056694045909		zilver bicolor hoogglans			



			Concept 300 Paar	VPE 2 Stuk		
QA2730	5036694045862 & 5036694045893	4.299,00	zwart bicolor hoogglans met Tensegrity stand	 	2 -weg Compacte luidspreker met of zonder Tensegrity stand 3-voudige behuizing „Gelcore“ Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht stuk Stand afmetingen h/d/b mm Stand Gewicht stuk	Bassreflex 25 - 200 Watt 41Hz - 30kHz 6 Ohm 90 dB 220 x 355 x 400 4,6kg 492 x 690 x 430 3,9 kg
QA2735	5036694045879 & 5036694045893		zilver bicolor hoogglans met Tensegrity stand			
QA2740	5036694045886 & 5036694045893		Wit bicolor hoogglans met Tensegrity stand			
QA2710	5036694045862	3.599,00	Zwart bicolor hoogglans zonder stand			
QA2715	5036694045879		Zilver bicolor hoogglans zonder stand			
QA2720	5036694045886		Wit bicolor hoogglans zonder stand			
QA2160	5036694045893	949,00	NUR Tensegrity stand	Tensegrity stands uitsluitend als set verkrijgbaar	stand Afmetingen mm H/T/B stand Gewicht stuk	492 x 690 x 430 3,9 kg

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties	
			Concept 50 Paar	VPE 2 Stuk		
QA2950	5036694047750	2.599,00	zwart hooghlans		Tiefmitteltöner Hochtöner Frequentieomvang (-6dB) Nennimpedanz Minimale impedantie Empfindlichkeit 2,83V @ 1 kHz empf. Verstärkerleistung Overgangsfrequentie Verzerringen @2,83Vrms Effectief volume Afmetingen Stk H/B/T mm Met Spikes en Voet Gehäusebreite Gewicht Stuk	2 x 125 mm 2 x 25 mm 42 Hz - 30 kHz 6 Ω 3,6 Ω 90,5 dB w/m 25 - 150 Watt 2,1 kHz 120 Hz-20kHz <0,2% 28,8 Liter 1.025 x 418 x 319 180 22,9 Kg
QA2952	5036694047767		zilver hooghlans			
QA2954	5036694047774		Wit hooghlans			

			Concept 30 Paar	VPE 2 Stuk		
QA2930	5036694047729	1.199,00	zwart hooghlans		Laag-middenbereik Tweeter Frequentierespons (-6dB) Nominale impedantie Minimale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Crossover frequentie Vervormingen @2,83Vrms Effectief volume Afmetingen stuk H/B/T mm Gewicht stuk	1 x 125 mm x 25 mm 54 Hz - 30 kHz 6 Ω 3,9 Ω 87 dB w/m 25 - 100 Watt 2,4 kHz 120 Hz-20kHz <0,2% 7 Liter 284 x 180 x 319 7,9 Kg
QA2932	5036694047736		zilver hooghlans			
QA2934	5036694047743		Wit hooghlans			
QA2180	5036694047842	89,00	Muurbeugel zwart	 Muurbeugel werden als stuk geleverd	Muurbeugel geschikt voor M20 en Concept 30 , 90 en 520 ,5090	
QA2182	5036694047859		Muurbeugel wit			
QA2170	5036694047712	459,00	stand zilver	 Stand worden als paar geleverd	VPE 2 stuk	

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties	
			Concept 90 Center	VPE 1 Stuk		
QA2990	5036694047781	849,00	zwart hooglans		Laag-middenbereik Tweeter Frequentierespons (-6dB) Nominale impedantie Minimaal impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Crossover frequentie Vervormingen @2,83Vrms Effectief volume Afmetingen stuk H/B/T mm Gewicht stuk	
QA2992	5036694047798		zilver hooglans			2 x 125 mm 2 x 25 mm 67 Hz - 30 kHz 6 Ω 3,7 Ω 87dB w/m 25 - 150 Watt 2,4 kHz 120 Hz-20kHz <0,2% 11 Liter 184 x 550 x 259 12,3 Kg
QA2994	5036694047804		Wit hooglans			
		4.400,00	zwart/zilver/wit hooglans Geen kleurmix mogelijk	Concept 5.0 Set bestaat uit • Concept 50 • Concept 30 • Concept Center Optioneel: Muurbeugel en voeten	Afmetingen + gegevens zie afzonderlijke producten	
		4.999,00	zwart/zilver/wit hooglans Geen kleurmix mogelijk Subwoofer zwart	Concept 5.1 Set bestaat uit • Concept 50 • Concept 30 • Concept Center • B12 aktiver Subwoofer Optioneel: Muurbeugel en voeten		




Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties	
5000 Serie						
Q 5010 2 weg compacte basreflex boekenplank luidspreker				VPE 2 Stuk		
QA5012	5036694051207	649,00	Satin zwart		Frequentierespons (-6dB) Nominale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Afmetingen stuk H/B/T mm Gewicht Stuk	56Hz - 30 kHz 6 Ω 86,3 dB w/m 15 - 90 Watt 264 x 160 x 263 5,6 kg
QA5014	5036694051214		Satin wit			
QA5016	5036694051221		Santos Rozenhout			
QA5018	5036694051368		Holme oak			
Q 5020 2 weg compacte basreflex boekenplank luidspreker				VPE 2 Stuk		
QA5022	5036694051238	799,00	Satin zwart		Frequentierespons (-6dB) Nominale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Afmetingen stuk H/B/T mm Gewicht Stuk	53Hz - 30 kHz 6 Ω 87,9 dB w/m 25 - 100 Watt 284 x 180 x 293 7,0 kg
QA5024	5036694051245		Satin wit			
QA5026	5036694051252		Santos Rozenhout			
QA5028	5036694051375		Holme oak			
Q 5040 2 weg vloerstaande luidspreker				VPE 2 Stuk		
QA5042	5036694051269	1.299,00	Satin zwart		Frequentierespons (-6dB) Nominale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Afmetingen stuk H/B/T mm Gewicht Stuk	39Hz - 30 kHz 6 Ω 91,5 dB w/m 25 - 150 Watt 967 x 361 x 293 18,0 kg
QA5044	5036694051276		Satin wit			
QA5046	5036694051283		Santos Rozenhout			
QA5048	5036694051382		Holme oak			
Q 5050 2 weg vloerstaande luidspreker				VPE 2 Stuk		
QA5052	5036694051290	1.699,00 	Satin zwart		Frequentierespons (-6dB) Nominale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Afmetingen stuk H/B/T mm Gewicht Stuk	37Hz - 30 kHz 6 Ω 91,5 dB w/m 25- 150 Watt 1017x 386*243 21,6kg
QA5054	5036694051306		Satin wit			
QA5056	5036694051313		Santos Rozenhout			
QA5058	5036694051399		Holme oak			
Q 5090 2 weg compact-basreflex-center-luidspreker				VPE 1 Stuk		
QA5092	5036694051320	499,00	Satin zwart		Frequentierespons (-6dB) Nominale impedantie Gevoeligheid 2,83V @ 1 kHz Aanbevolen vermogen Afmetingen stuk H/B/T mm Gewicht Stuk	57Hz - 30 kHz 6 Ω 90,5 dB w/m 25 - 150 Watt 164 x 430 x 243 8,5
QA5094	5036694051337		Satin wit			
QA5096	5036694051344		Santos Rozenhout			
QA5098	5036694051405		Holme oak			

SRP €	Model / Kleur		Specificaties
 5000 Serie Sets 			
Q 5000 5.0 Set 20/40			
2.399,00	Satin zwart/ wit / Santos Rozenhout /Holme oak Geen kleurmix mogelijk	Q 5000 Set besthend aus: Q5020 • Q5040 • Q5090	Afmetingen + gegevens zie afzonderlijke producten
		Optinoal Wandhalter ist 3000WB • Standfuß ist 3000FSI	
Q 5000 5.1 Set 20/40			
2.899,00	Satin zwart/ wit / Santos Rozenhout /Holme oak Geen kleurmix mogelijk Subwoofer zwart	Q 5000 Set besthend aus: Q5020 • Q5040 • Q5090 • Q3060S	Afmetingen + gegevens zie afzonderlijke producten
		Optinoal Muurbeugel is 3000WB - Voet is 3000FSI	
Q 5000 5.0 Set 10/20			
1.849,00	Satin zwart/ wit / Santos Rozenhout /Holme oak Geen kleurmix mogelijk	Q 5000 Set besthend aus: Q5010 • Q5020 • Q5090	Afmetingen + gegevens zie afzonderlijke producten
		Optinoal Muurbeugel is 3000WB - Voet is 3000FSI	
Q 5000 5.1 Set 10/20			
2.249,00	Satin zwart/ wit / Santos Rozenhout /Holme oak Geen kleurmix mogelijk Subwoofer zwart	Q 5000 Set besthend aus: Q5010 • Q5020 • Q5090 • Q3060S	Afmetingen + gegevens zie afzonderlijke producten
		Optinoal Muurbeugel is 3000WB - Voet is 3000FSI	

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties
Draadloze HD-audiosystemen					

M20 HD draadloos actief HD-audiosysteem

VPE 1 Set

QA7610	5036694047828	599,00	MD 20 HD Schwarz VPE Set	Muurbeugel WB 75 beschikbaar in zwart of wit RRP 89,00€ per stuk	
QA7612	5036694051115		MD 20 HD Walnuss VPE Set		
QA7614	5036694051153		MD 20 HD Weiß VPE Set		
				<p>Frequentierespons Crossover frequentie Continu uitgangsvermogen Impulsvermogen behuizing principe Afmetingen stuk B/H/T mm</p> <p>Connecties: Bluetooth® 5.0 (mit aptX™, aptX™ HD, aptX™ Low Latency, SBC und AAC kompatibel) USB (24 Bit/192 kHz kompatibel) Optisch digital (24 Bit/192 kHz kompatibel) Stereo Cinch 3,5 mm Miniklinke</p>	<p>55Hz - 22kHz 2,4 kHz 2 x 32 Watt 2 x 65 Watt Bassreflex 170 x 278 x 282</p>
					

geschikte accessoires

QA4104	5036694047354	219,00	Stand Wit	FS 50	VPE Paar : Stand FS 50 geschikt voor: Q 3010i, 3020i, 5010, 5020, M 20
QA4102	5036694047347		Stand zwart		
QA3100	5036694039687	29,90	Muurbeugel	Q 3000 WB 	VPE 1 stuk Muurbeugel für 3010i, 3020i, 3090Ci, 5010, M 20
QA2180	5036694047842	89,00	Muurbeugel zwart	 Q WB75	VPE 1 stuk Muurbeugel geschikt voor M20 en Concept 30,90, 5020, 5090
QA2182	5036694047859		Muurbeugel wit		

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijving	Specificaties
Kabellose HD Audiosysteme					

M 40 HD Micro-Tower

VPE 2 stuk

QA7640	5036694051436	899,00	M 40 HD Zwart		 Frequentiebereik (-6dB) Overgangsfrequentie Gevoeligheid 2,83V Versterkervermogen Afmetingen pcs B /H/D mm Gewicht	38 Hz - 22 kHz 2,5 kHz 86dB w/m 2 x 50 W RMS 250 x 710 x 296 12,1kg
QA7642	5036694051474		M 40 HD Walnoot			
QA7644	5036694051511		M 40 HD Wit			

3000i Serie

Q 3010i 2 weg compacte basreflex boekenplank luidspreker

VPE 2 stuk



QA3510	5036694047132	299,00	Grafiet			Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	25 - 75 Watt 65 Hz -30 kHz 6 Ohm 86 dB 150 x 253 x 252 4,0 kg
QA3512	5036694047149		Walnoot				
QA3516	5036694047156		Zwart				
QA3518	5036694047163		Wit				

Q 3020i 2weg compacte basreflex boekenplank luidspreker

VPE 2 stuk

QA3520	5036694047170	399,00	Grafiet			Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	25 - 75 Watt 64 Hz -30 kHz 6 Ohm 88 dB 170 x 278 x 282 5,5 kg
QA3522	5036694047187		Walnoot				
QA3526	5036694047194		Zwart				
QA3528	5036694047200		Wit				

geschikte accessoires

QA4104	5036694047354	219,00	Stand Wit	FS 50	VPE Paar : Stand FS 50 geschikt voor: Q 3010i, 3020i, 5010, 5020, M 20
QA4102	5036694047347		Stand zwart		
QA3100	5036694039687	29,90	Muurbeugel	Q 3000 WB 	VPE 1 stuk Muurbeugel für 3010i, 3020i, 3090Ci, 5010, M 20
QA2180	5036694047842	89,00	Muurbeugel zwart	 Q WB75	VPE 1 stuk Muurbeugel geschikt voor M20 en Concept 30,90, 5020, 5090
QA2182	5036694047859		Muurbeugel wit		

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties
----------	----------	-------	---------------	-------------------	---------------

Q 3030i 2 weg compacte basreflex boekenplank luidspreker

VPE 2 stuk

QA3530	5036694047651	499,00	Grafiet		Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	25 - 75 Watt 46 Hz -30 kHz 6 Ohm 88 dB 200 x 325 x 329 6,4 kg
QA3532	5036694047668		Walnoot			
QA3536	5036694047675		Zwart			
QA3538	5036694047682		Wit			

geschiktes accessoires

QA3204	5036694047644	249,00	stand Wit	Q3030i Stands: Stand geschikt nur für Q3030i worden als paar geleverd	Afmetingen B/H/T: 245 x 635 x 340 mm
QA3202	5036694047637		stand zwart		

Q 3050i 2 weg vloerstaande luidspreker

VPE 2 stuk

QA3550	5036694047217	949,00	Grafiet		Behuizingstype Aanbevolen vermogen Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	Bassreflex - Dubbele woofer 25 - 100 Watt 44 Hz -30 kHz 6 Ohm 91 dB 310 x 1020 x 310 17,8 kg
QA3552	5036694047224		Walnoot			
QA3556	5036694047231		Zwart			
QA3558	5036694047248		Wit			

Q 3090 Ci 2 weg compact-basreflex-center-luidspreker


VPE 2 stuk

QA3590	5036694047255	299,00	Grafiet		Behuizingstype Aanbevolen vermogent Frequentierespons Nominale impedantie Gevoeligheid Afmetingen h/d/b in mm Gewicht	Bassreflex 25 - 100 Watt 75 Hz 30kHz 6 Ohm 89 dB 430 x 152 x 216 6 kg
QA3592	5036694047262		Walnoot			
QA3596	5036694047279		Zwart			
QA3598	5036694047286		Wit			

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties
----------	----------	-------	---------------	-------------------	---------------

Q 3060S actief subwoofer




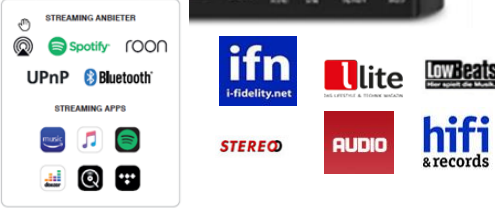

VPE 1 Set









QA3560	5036694047293	499,00	Grafiet		Behuizingstype Woofer Versterker vermogen Crossover frequentie Afmetingen h/d/b in mm Gewicht	Infinite baffle 200 mm 150W Claas D 35 Hz - 250 Hz (variabele) 480 x 300 x 150 8,5 kg
QA3562	5036694047309		Walnoot			
QA3566	5036694047316		zwart			
QA3568	5036694047323		Wit			


Q B12 actief subwoofer

VPE 1 stuk

QA8700	5036694047491	699,00	B12 zwart		Aandrijfeenheid Piek versterkervermogen Frequentiebereik Crossover frequentiebereik Ingangsgevoeligheid Afmetingen (H / B / D) Gewicht	305mm high-exursion 440 W 28 Hz - 300 Hz 70 Hz - 225 Hz 150 mV 400 x 400 x 446 mm 21.5 kg
QA8702	5036694047507		B12 Wit			

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties	
			Q Active 200 Muzieksysteem in een basreflexbehuizing		VPE 1 Set	
QA8204	5036694047897	1.999,00	Swart Google Version	 	† 2021 erhältlich Driver voor volledig bereik Subwoofer (hoge excursie) Crossover frequentie Frequentierespons van het systeem (vrije grens) (-6dB) Continu uitgangsvermogen Impulsvermogen	2 x BMR 58mm 2 x 114mm 150Hz 46Hz to 20kHz 2 x 100 Watt 2x 180 Watt
QA8208	5036694047910		Wit Google Version	 	Gewicht (per luidspreker) Afmetingen (per luidspreker) Afmetingen op statief Draadloze connectiviteit Bluetooth Hi-Res draadloze verbinding Audio Bemonsteringsfrequentie Bit diepte Maximale bronresolutie	7.5kg 284 x 170 x 290mm 922 x 286 x 338mm v4.1 Low Energy 5.8GHz 96kHz 24bits 32bit/192kHz
QA2170	5036694047712	459,00	Q FS75 Stand Paar		Afmetingen H X B x T : 922 x 286 x 338 mm	
			Stands worden als paar geleverd			

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties
			Q Active 400 Musiksysteem im Bassreflexgehäuse		VPE 1 Set
QA8404	5036694047934	2.999,00	zwart Google Version		   <p>† 2021 erhältlich</p>
QA8408	5036694047958		Wit Google Version		<p>Driver voor volledig bereik</p> <p>Subwoofer (hoge excursie)</p> <p>Crossover frequentie</p> <p>Frequentierespons van het systeem (vrije grens) (-6dB)</p> <p>Continu uitgangsvermogen</p> <p>Impulsvermogen</p> <p>Gewicht (per luidspreker)</p> <p>Afmetingen (per luidspreker)</p> <p>Afmetingen op statief</p> <p>Draadloze connectiviteit</p> <p>Bluetooth</p> <p>Hi-Res draadloze verbinding</p> <p>Audio</p> <p>Bemonsteringsfrequentie</p> <p>Bit diepte</p> <p>Maximale bronresolutie</p>
 			 		

Art.-Nr.	EAN Code	SRP €	Model / Kleur	Korte beschrijvin	Specificaties
Easy Install					
QI0120	5036694051009	599,00	Q E120 SYSTEM PACK BLACK (excluding speakers)		<ul style="list-style-type: none"> - Gemakkelijke wandmontage in elke kamer in huis of op kantoor. - Onopvallend ontwerp - kan worden gecombineerd met twee of vier Q Acoustics plafond- of wandluidsprekers - Hoogwaardige geïntegreerde klasse D-stereoversterker met een uitgangsvermogen van 2 x 25 W - IP54-certificering voor keukens en badkamers - Bluetooth® 5.0 voor draadloos streamen van muziek van compatibele apparaten - Ingebouwde DAB+ en FM radio's met voorkeuzezenders - Aanraakgevoelige bediening, spatwaterdicht en grotere afstandsbediening inbegrepen - 81 mm kleurenscherm - Digitale en analoge ingangen voor het aansluiten van audiobronnen zoals TV-audio - Audio-uitgang voor aansluiting van een subwoofer, een externe eindversterker of een andere E120
QI0122	5036694051016		Q E120 SYSTEM PACK WHITE (excluding speakers)		
QI0130		749,00	Q E120 + i65CB SPEAKER BUNDLE BLACK		
QI0132			Q E120 + i65CB SPEAKER BUNDLE WHITE		

Q Acoustics Ci-Series

In-Ceiling Speaker Professional Series

Qi 65 CB

 **INSTALL**
ACOUSTICS



Short description:


Tweeter diameter:	55 mm	'UL94' certified
Swivel	No	
Adjustment of the output level::	No	
Woofer diameter:	165 mm	
Power handling (program):	10 - 50 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	93 dB	
Response(Low freq.) -3dB Hz	77 Hz	

Dimensions:

Cutout Size:	203 mm
Maximum rear depth:	73 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 232 mm
----------------	-------------------------



Item description:	QI 65 CB
Item Code	QI1105
EAN:	5036694039229
PU:	10 pieces
SRP incl. VAT (PU in €)	990,00

Accessories:

Fire & Acoustic Hoods	QI 65 CF
Item Code	QI9160
EAN:	5036694045473
SRP incl. VAT (PU in €) (piece):	99,00



Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com

In-Ceiling Speaker Professional Series

Qi 65

Q INSTALL
ACOUSTICS



Short description:

Tweeter diameter:	19 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	No	
Woofer diameter:	165 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	89 dB	
Response(Low freq.) -3dB Hz	75 Hz	

Dimensions:

Cutout Size:	203 mm
Maximum rear depth:	79 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 232 mm	Square Grill 232 x 232 mm
		
Item description:	Qi 65 C	Qi 65 S
Item Code	QI1110	QI1120
EAN:	5036694032701	5036694032718
PU:	Pair	Pair
SRP incl. VAT (PU in €)	320,00	320,00

Accessories:

Fire & Acoustic Hoods	Qi 65 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9160	
EAN:	5036694045473	
SRP incl. VAT (PU in €). (piece):	99,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Professional Series

Qi 65 Stereo



Short description:

Tweeter diameter:	2 x 19 mm	'UL94' certified
Swivel	No	
Adjustment of the output level:	No	
Woofer diameter:	165 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	86 dB	
Response(Low freq.) -3dB Hz	75 Hz	

Dimensions:

Cutout Size:	203 mm
Maximum rear depth:	84 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 232 mm	Square Grill 232 x 232 mm
		
Item description:	QI 65 C Stereo	QI 65 S Stereo
Item Code	QI1150	QI1160
EAN:	5036694032749	5036694032756
PU:	piece	piece
SRP incl. VAT (PU in €)	220,00	220,00

Accessories:


Fire & Acoustic Hoods	QI 65 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9160	
EAN:	5036694045473	
SRP incl. VAT (PU in €)	99,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Professional Series

Qi 80

Q INSTALL
ACOUSTICS




Short description:

Tweeter diameter:	19 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	No	
Woofer diameter:	200 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	88 dB	
Response(Low freq.) -3dB Hz	63 Hz	

Dimensions:

Cutout Size:	248 mm
Maximum rear depth:	87 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 281 mm
	
Item description:	QI 80
Item Code	QI1208
EAN:	5036694039724
PU:	Pair
SRP incl. VAT (PU in €)	480,00

Accessories:

Fire & Acoustic Hoods	QI 80 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9180	
EAN:	5036694045480	
SRP incl. VAT (PU in €). (piece):	109,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Performance Series

Qi 65 P

Q INSTALL
ACOUSTICS



Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	165 mm	
Power handling (program):	15 - 80 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	90 dB	
Response(Low freq.) -3dB Hz	70 Hz	

Dimensions:

Cutout Size:	203 mm
Maximum rear depth:	79 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 232 mm	Square Grill 232 x 232 mm
		
Item description:	QI 65 CP	Qi 65 SP
Item Code	QI1130	QI1140
EAN:	5036694032725	5036694032732
PU:	piece	piece
SRP incl. VAT (PU in €)	260,00	260,00

Accessories:

Fire & Acoustic Hoods	QI 65 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9160	
EAN:	5036694045473	
SRP incl. VAT (PU in €)	99,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Performance Series

Qi 65 P Stereo

Q INSTALL
ACOUSTICS



Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	No	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	165 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	87 dB	
Response(Low freq.) -3dB Hz	70 Hz	

Dimensions:

Cutout Size:	203 mm
Maximum rear depth:	84 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 232 mm	Square Grill 232 x 232 mm
		
Item description:	Qi 65 CP Stereo	Qi 65 SP Stereo
Item Code	QI1170	QI1180
EAN:	5036694032763	5036694032770
PU:	piece	piece
SRP incl. VAT (PU in €)	350,00	350,00

Accessories:

Fire & Acoustic Hoods	Qi 65 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9160	
EAN:	5036694045473	
SRP incl. VAT (PU in €)	99,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Performance Series

Qi 80 P

Q INSTALL
ACOUSTICS




Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	200 mm	
Power handling (program):	15 - 80 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	97 dB	
Response(Low freq.) -3dB Hz	55 Hz	

Dimensions:

Cutout Size:	248 mm
Maximum rear depth:	97 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 281 mm
	
Item description:	QI 80 CP
Item Code	QI1210
EAN:	5036694032954
PU:	piece
SRP incl. VAT (PU in €)	360,00

Accessories:

Fire & Acoustic Hoods	QI 80 CF
Item Code	QI9180
EAN:	5036694045480
SRP incl. VAT (PU in €)	109,00



Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com

In-Wall Speaker Performance Series

Qi 65 RP

 **INSTALL**
ACOUSTICS



Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	165 mm	
Power handling (program):	30 - 120 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	85 dB	
Response(Low freq.) -3dB Hz	65 Hz	

Dimensions:

Ausschnitt (HxB):	275 x 187 mm
Maximum rear depth:	79 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 19 l (min. 12 l)

Variations:

Dimensions Grill (HxB):	Rectangular Grill 306 x 219 mm
-------------------------	-----------------------------------



Item description:	QI 65 RP
Item Code	QI2110
EAN:	5036694039243
PU:	piece
SRP incl. VAT (PU in €)	320,00

Accessories:

Fire & Acoustic Hoods	QI 65 RF
Item Code	QI9260
EAN:	5036694045497
SRP incl. VAT (PU in €)	140,00

Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com



In-Wall Speaker Performance Series

Qi 80 RP

 **INSTALL**
ACOUSTICS



Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	200 mm	
Power handling (program):	30 - 160 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	88 dB	
Response(Low freq.) -3dB Hz	60 Hz	

Dimensions:

Ausschnitt (HxB):	335 x 233 mm
Maximum rear depth:	95 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 23 l (min. 16 l)

Variations:

Dimensions Grill (HxB):	Rectangular Grill 365 x 263 mm
-------------------------	-----------------------------------



Item description:	QI 80 RP
Item Code	QI2210
EAN:	5036694039250
PU:	piece
SRP incl. VAT (PU in €)	380,00

Accessories:

Fire & Acoustic Hoods	QI 80 RF
Item Code	QI9280
EAN:	5036694045503
SRP incl. VAT (PU in €)	150,00

Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com



In-Wall Speaker Performance Series

Qi 65 LCR

 **INSTALL**



Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	Yes	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	2 x 165 mm	
Power handling (program):	30 - 160 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	87 dB	
Response(Low freq.) -3dB Hz	65 Hz	

Dimensions:

Ausschnitt (HxB):	193 x 483 mm
Maximum rear depth:	85 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 28 l (min. 21 l)

Variations:

Dimensions Grill (HxB):	Rectangular Grill 221 x 511 mm
-------------------------	-----------------------------------



Item description:	QI 65 RP LCR
Item Code	QI2150
EAN:	5036694039267
PU:	piece
SRP incl. VAT (PU in €)	430,00

Accessories:

Fire & Acoustic Hoods	QI 65 LCRF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9280	
EAN:	5036694045510	
SRP incl. VAT (PU in €). (piece):	150,00	helmuts@idc-klaassen.com



Einbaulautsprecher Performance Serie

In-Wall speaker geschikt voor vochtige ruimten

Qi 50 CW

Q INSTALL
ACOUSTICS



Short description:

Tweeter diameter:	19 mm	'UL94' certified
Swivel	No	
Adjustment of the output level:	No	
Woofer diameter:	130 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	87 dB	
Response(Low freq.) -3dB Hz	75 Hz	

Dimensions:

Cutout Size:	182 mm
Maximum rear depth:	79 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	26 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 204 mm
----------------	-------------------------



Item description:	QI 50 CW
Item Code	QI1050
EAN:	503669403569
PU:	Pair
SRP incl. VAT (PU in €)	430,00

Accessories:

Fire & Acoustic Hoods	QI 50 CF
Item Code	QI9160
EAN:	5036694045466
SRP incl. VAT (PU in €). (piece):	99,00



Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com

In-Ceiling Speaker Weatherproof Series

Qi 65 CW

Q INSTALL
ACOUSTICS




Short description:

Tweeter diameter:	25 mm	'UL94' certified
Swivel	No	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	165 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	87 dB	
Response(Low freq.) -3dB Hz	65 Hz	

Dimensions:

Cutout Size:	197 mm
Maximum rear depth:	84 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	36 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 230 mm
	
Item description:	QI 65 CW
Item Code	QI1190
EAN:	5036694032787
PU:	Pair
SRP incl. VAT (PU in €)	489,00

Accessories:

Fire & Acoustic Hoods	QI 65 CF	Back boxes for drywall as well as stone and concrete installations on request:
Item Code	QI9160	
EAN:	5036694045473	
SRP incl. VAT (PU in €). (piece):	99,00	helmuts@idc-klaassen.com



In-Ceiling Speaker Weatherproof Series

Qi 65 CW ST

Q INSTALL
ACOUSTICS




Short description:

Tweeter diameter:	2 x 13 mm	'UL94' certified
Swivel	No	
Adjustment of the output level:	+/- 3 dB	
Woofer diameter:	165 mm	
Power handling (program):	15 - 60 W	
Impedance (nominal):	8 Ohm	
Sensitivity dB spl (2.83V, 1m):	85 dB	
Response(Low freq.) -3dB Hz	65 Hz	

Dimensions:

Cutout Size:	197 mm
Maximum rear depth:	84 mm
Fixing type:	Twist clamp
minimum wall/ceiling thickness	6 mm
maximum wall/ceiling thickness	36 mm
Ideal volume:	≥ 10 l (min. 8 l)

Variations:

Size(grilles):	Round Grill ø 230 mm
	
Item description:	QI 65 CW Stereo
Item Code	QI1200
EAN:	5036694032794
PU:	piece
SRP incl. VAT (PU in €)	299,00

Accessories:

Fire & Acoustic Hoods	QI 65 CF
Item Code	QI9160
EAN:	5036694045473
SRP incl. VAT (PU in €)	99,00



Back boxes for drywall as well as stone and concrete installations on request:

helmuts@idc-klaassen.com

"Garden" outdoor luidspreker weerbestendig

Qi 65 LW

Q INSTALL
ACOUSTICS



Short description:

Tweeter diameter:	25 mm
Swivel	-
Adjustment of the output level:	-
Woofer diameter:	165 mm
Power handling (program):	10 - 60 W
Impedance (nominal):	8 Ohm
Sensitivity dB spl (2.83V, 1m):	88 dB
Response(Low freq.) -3dB Hz	55 Hz
Frequency range:	70 Hz - 20 kHz

Dimensions:

(HxWxD)	330 x 280 x 240 mm
---------	--------------------

Variations:

stone grey



Item description:	Qi 65 LW
Item Code	QI3210
EAN:	5036694032817
PU:	piece
SRP incl. VAT (PU in €)	399,00

Fire & Acoustic Hoodsn

Q INSTALL
ACOUSTICS

Glasweefsel ester:
Gewicht:
Aantal garens:
Soortelijk gewicht:
Ontbrandingstemperatuur:
Thermische energie:
Testonderdeel:

0,40 mm
430 g/m²
1.360 dtex
10 - 600 kg/m²
tussen 315°C und 370°C
28.000 KJ/kg
Voldoet aan deel B en E van de Britse
bouwvoorschriften



Q Acoustics en IDC Klaassen bevelen QED kabels aan

Lautsprekerkabel gebruiksklaar

Performance XT 25

QE1460	5036694043240	2 x 2 m gebruiksklaar	99,00 €
QE1462	5036694043257	2 x 3 m gebruiksklaar	109,00 €
QE1464	5036694043264	2 x 5 m gebruiksklaar	149,00 €



Reference XT 40i

QE1451	5036694043295	2 x 2 m gebruiksklaar	159,00 €
QE1453	5036694043301	2 x 3 m gebruiksklaar	189,00 €
QE1455	5036694043318	2 x 5 m gebruiksklaar	249,00 €



Reference Silver Anniversary XT

QE1430	5036694010914	2 x 2 m gebruiksklaar	129,00 €
QE1432	5036694010921	2 x 3 m gebruiksklaar	149,00 €
QE1434	5036694010976	2 x 5 m gebruiksklaar	189,00 €



Signature Revelation

QE1440	5036694043004	2 x 2 m gebruiksklaar	189,00 €
QE1442	5036694043011	2 x 3 m gebruiksklaar	249,00 €
QE1444	5036694043028	2 x 5 m gebruiksklaar	369,00 €



Signature Genesis Spiral


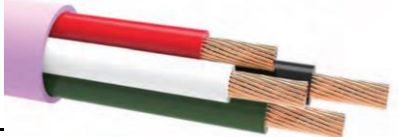
QE1480	5036694043783	2 x 2 m gebruiksklaar	449,00 €
QE1482	5036694043790	2 x 2,5 m gebruiksklaar	499,00 €
QE1484	5036694043806	2 x 3 m gebruiksklaar	549,00 €
QE1486	5036694043813	2 x 5 m gebruiksklaar	829,00 €



QED Custom Install Produkte


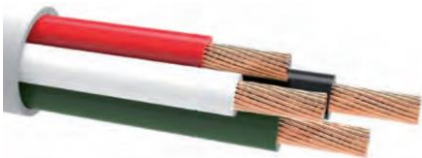
LSZH luidsprekerkabel Low Smoke Zero Halogen

IEC 61034-1:2005, IEC 61034-2:2005 IEC 60332-1-2:2004, IEC 60754-2:1991 for fire and gas emissions.

QE4010	5036694012000	QX16/2 LSZH 100 m (roll)	199,00 €	
QE4015	5036694007417	QX16/2 LSZH 300 m (roll)	529,00 €	
QE4025	5036694007488	QX16/4 LSZH 100 m (roll)	389,00 €	
QE4025	5036694007488	QX16/4 LSZH 300 m (roll)	959,00 €	



Vlamvertragend PVC luidsprekerkabel

PVC-Hoogwaardige buitenmantel - Voldoet of overtreft IEC60332-1

QE4130	5036694040003	QX16/2 PVC wit 100 m (roll)	189,00 €	
QE4135	5036694040010	QX16/2 PVC wit 300 m (roll)	469,00 €	
QE4140	5036694040027	QX16/4 PVC wit 100 m (roll)	329,00 €	
QE4145	5036694040034	QX16/4 PVC wit 300 m (roll)	839,00 €	

Buitenbrandkabel

met een water- en UV-bestendige PE buitenmantel

QE4155	5036694040041	QX 16/2 cable 300 m (roll)	549,00 €	 
QE4165	5036694040058	QX 16/4 cable 300 m (roll)	989,00 €	

Notizen

Notizen

PREMIUM AUDIO OPLOSSINGEN



VOOR MEER INFORMATIE KUNT U CONTACT OPNEMEN MET

IDC Klaassen International Distribution & Consulting oHG
Am Brambusch 22 • D-44536 Lünen • Deutschland
E-Mail: idc@idc-klaassen.com | Tel: +49 (0) 231 49 62 99 96
www.idc-klaassen.nl

Ontwerp en specificaties zijn onder voorbehoud van wijzigingen en fouten.